




ARTIGO (REFERÊNCIA) <i>Producto Product</i>	GRULPV-150-24
SÉRIE <i>Serie Series</i>	LPV
TIPO <i>Tipo Type</i>	Transformador <i>Transformador Transformer</i>
TECNOLOGIA <i>Tecnología Technology</i>	Tensão constante AC/DC 24V <i>Tensión constante Constant voltage</i>
CÓDIGO DE BARRAS <i>Código de barras Barcode</i>	--
COR <i>Color Colour</i>	--
MATERIAL <i>Material Material</i>	Plástico <i>Plástico Plastic</i>

DIÂMETRO (D.) <i>Diámetro Diameter</i>	--
ALTURA (A.) <i>Altura Height</i>	3,75cm
COMPRIMENTO (C.) <i>Longitud Length</i>	19,1cm
LARGURA (L.) <i>Ancho Width</i>	6,3cm
PESO <i>Peso Weight</i>	810g

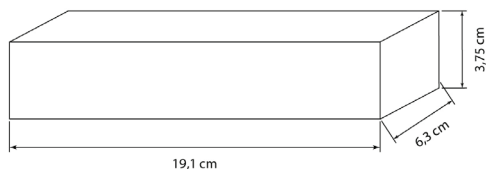

INFORMAÇÃO GERAL

Información General | General Information

Índice de proteção <i>Índice de Protección Protection Index</i>	IP67 <i>Tipo</i>
Classe de proteção <i>Clase de protección Protection class</i>	Classe II
Fator de potência <i>Factor de potencia Power factor</i>	--
Número de LED <i>Número de LED LED number</i>	--
Secção de entrada <i>Sección de entrada Input section</i>	--
Secção de saída <i>Sección de salida Output section</i>	--

INFORMAÇÃO TÉCNICA

Información técnica | Technical information

Tensão de entrada <i>Voltaje de entrada Input voltage</i>	200-240Vac
Frequência <i>Frecuencia Frequency</i>	50/60Hz
Potência <i>Potencia Power</i>	150W
Corrente de entrada (máx) <i>Corriente de entrada (máx) Input current (max)</i>	1,7A
Tensão de saída <i>Voltaje de salida Output voltage</i>	24Vdc
Corrente de saída <i>Corriente de salida Output current</i>	6,3A
Eficiência (%) <i>Eficiencia Efficiency</i>	89%
Temperatura ambiente (Ta) <i>Temperatura ambiente Ambient temperature</i>	-25..+65°C
Temperatura Invólucro (Tc) <i>Temperatura de la carcasa Case Temperature</i>	--
Isolação <i>Aislamiento Insulation</i>	--

PROTEÇÕES


Protecciones | Protections

Proteção curto circuito (SCP) <i>Protección contra cortocircuitos Short circuit protection</i>	Sim <i>Sí Yes</i>
Proteção sobrecarga (OPP) <i>Protección de sobrecarga Overload protection</i>	Sim <i>Sí Yes</i>
Proteção sobreaquecimento (OTP) <i>Protección contra sobretemperatura Over temperature protection</i>	--
Proteção sobretensões (OVP) <i>Protección contra sobretensiones Overvoltage protection</i>	Sim <i>Sí Yes</i>
Proteção de sobrecarga (L-N) <i>Protección de sobrecarga Surge protection</i>	--
Tremulação <i>Parpadeo Flicker</i>	--
Potência sem carga <i>Energía sin carga No-load power</i>	--



ARTIGO (REFERÊNCIA) <i>Producto Product</i>	GRULPV-150-24
SÉRIE <i>Serie Series</i>	LPV
TIPO <i>Tipo Type</i>	Transformador <i>Transformador Transformer</i>
TECNOLOGIA <i>Tecnología Technology</i>	Tensão constante AC/DC 24V <i>Tensión constante Constant voltage</i>
CÓDIGO DE BARRAS <i>Código de barras Barcode</i>	--
COR <i>Color Colour</i>	--
MATERIAL <i>Material Material</i>	Plástico <i>Plástico Plastic</i>

DIÂMETRO (D.) <i>Diámetro Diameter</i>	--
ALTURA (A.) <i>Altura Height</i>	3,75cm
COMPRIMENTO (C.) <i>Longitud Length</i>	19,1cm
LARGURA (L.) <i>Ancho Width</i>	6,3cm
PESO <i>Peso Weight</i>	81g

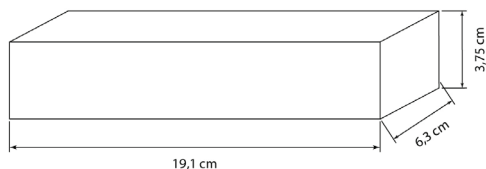

INFORMAÇÃO GERAL

Información General | General Information

Índice de proteção <i>Índice de Protección Protection Index</i>	IP67 <i>Tipo</i>
Classe de proteção <i>Clase de protección Protection class</i>	Classe II
Fator de potência <i>Factor de potencia Power factor</i>	--
Número de LED <i>Número de LED LED number</i>	--
Secção de entrada <i>Sección de entrada Input section</i>	--
Secção de saída <i>Sección de salida Output section</i>	--

INFORMAÇÃO TÉCNICA


Información técnica | Technical information

Tensão de entrada <i>Voltaje de entrada Input voltage</i>	200-240Vac
Frequência <i>Frecuencia Frequency</i>	50/60Hz
Potência <i>Potencia Power</i>	150W
Corrente de entrada (máx) <i>Corriente de entrada (máx) Input current (max)</i>	1,7A
Tensão de saída <i>Voltaje de salida Output voltage</i>	24Vdc
Corrente de saída <i>Corriente de salida Output current</i>	6,3A
Eficiência (%) <i>Eficiencia Efficiency</i>	89%
Temperatura ambiente (Ta) <i>Temperatura ambiente Ambient temperature</i>	-25..+65°C
Temperatura Invólucro (Tc) <i>Temperatura de la carcasa Case Temperature</i>	--
Isolação <i>Aislamiento Insulation</i>	--

PROTEÇÕES

Protecciones | Protections

Proteção curto circuito (SCP) <i>Protección contra cortocircuitos Short circuit protection</i>	Sim <i>Sí Yes</i>
Proteção sobrecarga (OPP) <i>Protección de sobrecarga Overload protection</i>	Sim <i>Sí Yes</i>
Proteção sobreaquecimento (OTP) <i>Protección contra sobretemperatura Over temperature protection</i>	--
Proteção sobretensões (OVP) <i>Protección contra sobretensiones Overvoltage protection</i>	Sim <i>Sí Yes</i>
Proteção de sobrecarga (L-N) <i>Protección de sobrecarga Surge protection</i>	--
Tremulação <i>Parpadeo Flicker</i>	--
Potência sem carga <i>Energía sin carga No-load power</i>	--



■ Features

- Constant voltage design
- 90~132VAC input for LPVL-150
180~305VAC input for LPV-150
- Fully encapsulated with IP67 level (Note.7)
- Class II power unit, no FG
- Protections: Short circuit/Overload/Over voltage/
Over temperature
- Fully isolated plastic case
- Fanless design, cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- Listed in UL Sign Component Manual (SAM)
- Type "HL" for use in class I, Division 2 hazardous (Classified)
location luminaires for LPVL-150
- 2 years warranty

■ Applications

- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)(Note.10)


■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

LPV-150 and LPVL-150 are 150W single output power supplies that specifically and perfectly work for LED lighting and LED moving sign applications. As a class II power unit, these two series are housed with the UL 94V-0 rated flame retardant plastic enclosure. The IP67 design allows every model to fit the use at dry, damp and wet locations. Both series are constant voltage mode design that various models with 12V, 15V, 24V, 36V and 48V are offered for LPV-150 where as 12V and 24V are provided for LPVL-150.

■ Model Encoding

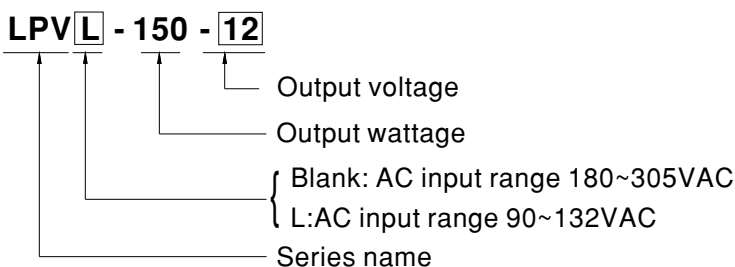





SPECIFICATION


MODEL		LPV□-150-12	LPV-150-15	LPV□-150-24	LPV-150-36	LPV-150-48	
OUTPUT	DC VOLTAGE	12V	15V	24V	36V	48V	
	RATED CURRENT	10A	8A	6.3A	4.2A	3.2A	
	CURRENT RANGE	0 ~ 10A	0 ~ 8A	0 ~ 6.3A	0 ~ 4.2A	0 ~ 3.2A	
	RATED POWER	120W	120W	151.2W	151.2W	153.6W	
	RIPPLE & NOISE (max.) Note.2	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	
	VOLTAGE TOLERANCE Note.3	±5.0%					
	LINE REGULATION	±1.0%					
	LOAD REGULATION	±2.0%					
	SETUP, RISE TIME Note.6	LPV-150: 500ms, 50ms / 230VAC 500ms, 50ms / 277VAC; LPVL-150: 1500ms, 50ms / 115VAC					
HOLD UP TIME (Typ.)	LPV-150: 18ms/230VAC 20ms/277VAC at full load; LPVL-150: 10ms/115VAC at full load						
INPUT	VOLTAGE RANGE Note.4	LPV-150: 180 ~ 305VAC 254 ~ 431VDC; LPVL-150: 90~132VAC					
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	87%	88%	89%	89%	90%	
	AC CURRENT	LPV-150: 1.7A/230VAC 1.5A/277VAC; LPVL-150: 3.0A/115VAC					
	INRUSH CURRENT (Typ.)	Blank type	COLD START 60A(twidth=900μs measured at 50% Ipeak) at 230VAC				
		L type	COLD START 75A(twidth=900μs measured at 50% Ipeak) at 115VAC				
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	Blank type	2 units (circuit breaker of type B) / 3 units (circuit breaker of type C) at 230VAC				
L type		1 units (circuit breaker of type B) / 2 units (circuit breaker of type C) at 115VAC					
LEAKAGE CURRENT	LPV-150: 0.25mA / 240VAC LPVL-150:0.25mA / 120VAC						
PROTECTION	OVERLOAD	110 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	OVER VOLTAGE	13.5 ~ 18V	17 ~ 25V	27 ~ 35V	40 ~ 49V	52 ~ 63V	
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down					
ENVIRONMENT	WORKING TEMP.	-25 ~ +65°C (Refer to "Derating Curve")					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 40°C for LPV-150-12,15 and LPVL-150-12,24;0~50°C for LPV-150-24,36,48)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
SAFETY & EMC	SAFETY STANDARDS	Blank type	UL8750, CSA C22.2 No 250.13-12, UL879, CSA C22.2 No.207-M89, BIS IS15885(for LPV-150-12,24 only), EAC TP TC 004, IP67, IEC62368-1, BS EN/EN62368-1 approved				
		L type	UL8750(type"HL"), CSA C22.2 No 250.13-12, UL879, CSA C22.2 No.207-M89, IP67 approved				
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC					
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25°C/ 70% RH					
	EMC EMISSION	Blank type	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2 Class A(≤80% load), BS EN/EN61000-3-3, EAC TP TC 020				
L type		Compliance to FCC part 15					
EMC IMMUNITY	Blank type	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN55035, light industry level, EAC TP TC 020					
	L type	Design refer to IEC61000-4-2,3,4,5,6,8,11; light industry level					
OTHERS	MTBF	3361.2K hrs min. Telcordia SR-332 (Bellcore) ; 391.9Khrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	191*63*37.5mm (L*W*H)					
	PACKING	LPV-150: 0.74Kg;20pcs/15.8Kg/0.95CUFT; LPVL-150: 0.85Kg;20pcs/17Kg/0.95CUFT					
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC(115VAC for LPVL) input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Derating may be needed under low input voltage. Please check the static characteristics for more details.</p> <p>5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf)</p> <p>6. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.</p> <p>7. Suitable for indoor use or outdoor use without direct sunlight exposure.</p> <p>8. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>9. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf</p> <p>10. This product is not intended for LED lighting luminaire applications in the EU.(In the EU the LPF/NPF/XLG series are recommended.)</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>						

■ Mechanical Specification

Case No. LPC-150 Unit:mm

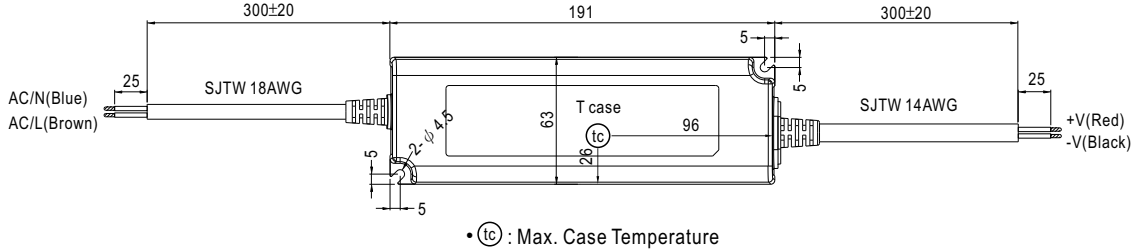


■ Recommend Mounting Direction




■ Block Diagram

PWM fosc : 47KHz

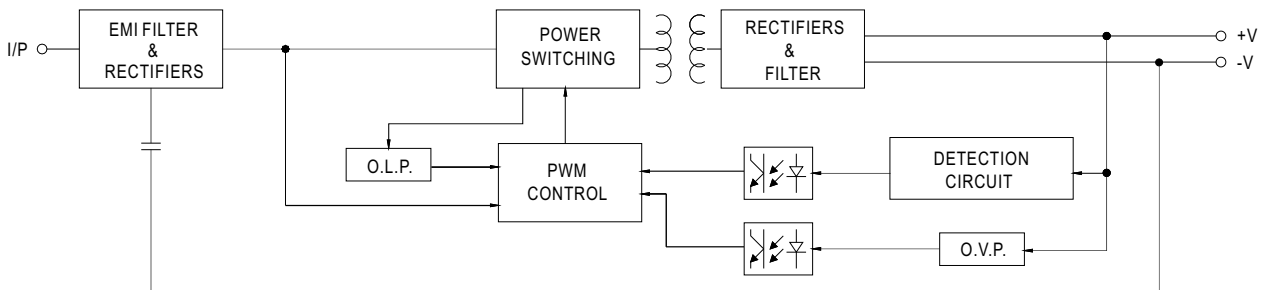

■ Derating Curve

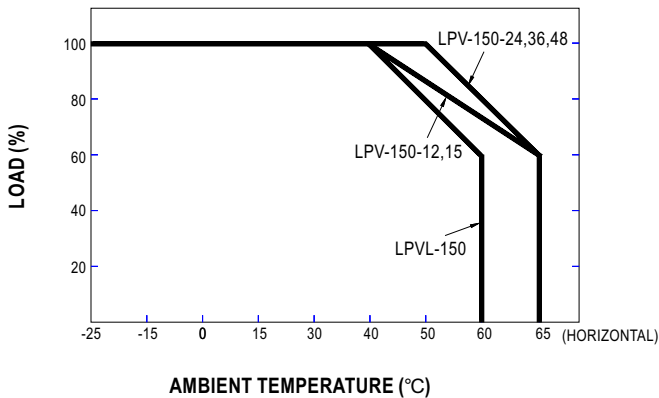

■ Static Characteristics

