

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: FUMAGALLI SRL

Supplier's address: FUMAGALLI SRL, Via Ca Bassa 29, 21100 Varese, IT

Model identifier: H3.LED.G53.CCT(V2)

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GX53 LAMP CAP		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	975 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 6 500
On-mode power (P_{on}), expressed in W	10,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	100	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	100	
	Depth	37	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,440 0,403
Parameters for directional light sources:			
Peak luminous intensity (cd)	407	Beam angle in degrees, or the range of beam angles that can be set	112
Parameters for LED and OLED light sources:			
R9 colour rendering index value	0	Survival factor	1,00
the lumen maintenance factor	0,97		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a) '-': not applicable;

(b) '-': not applicable;


Spectral power distribution

3000K

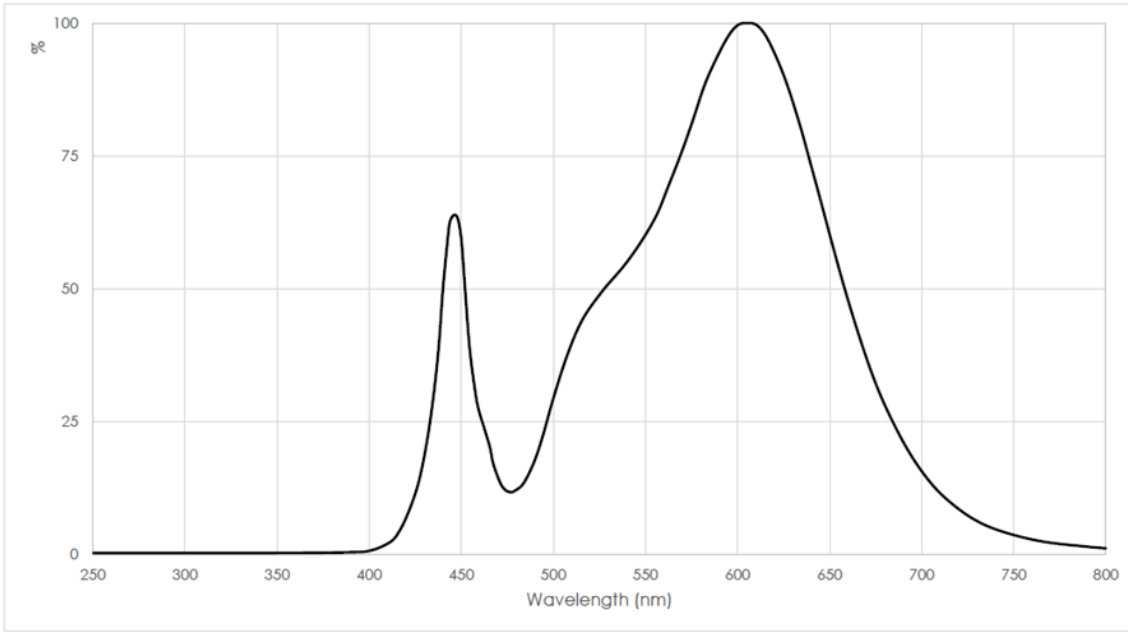


Spectral power distribution

4000K

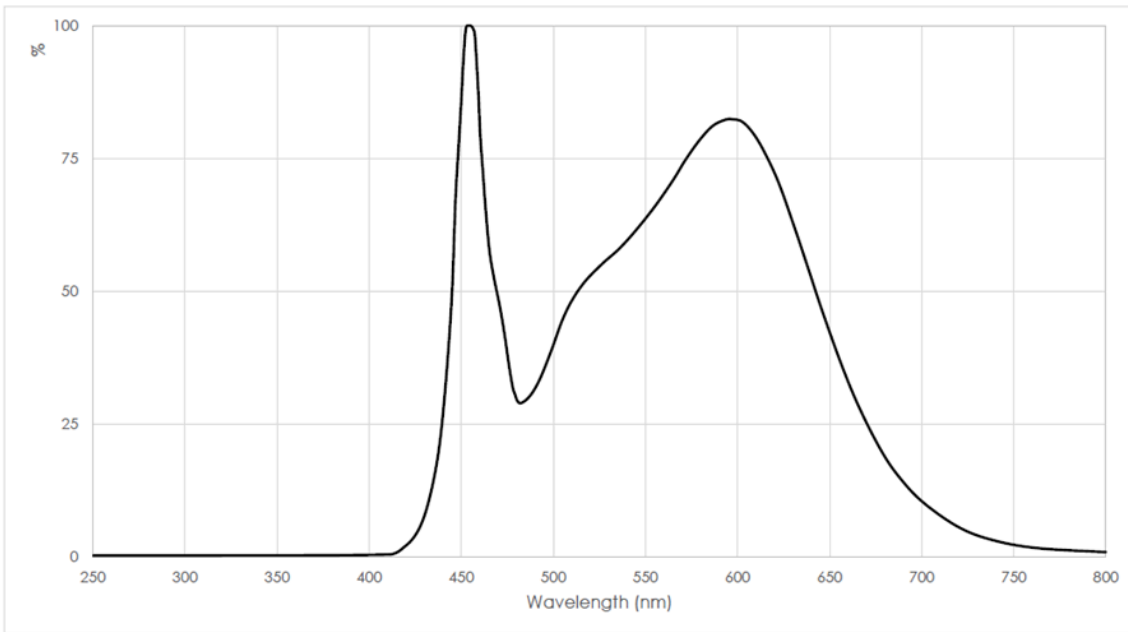


Spectral power distribution

6500K

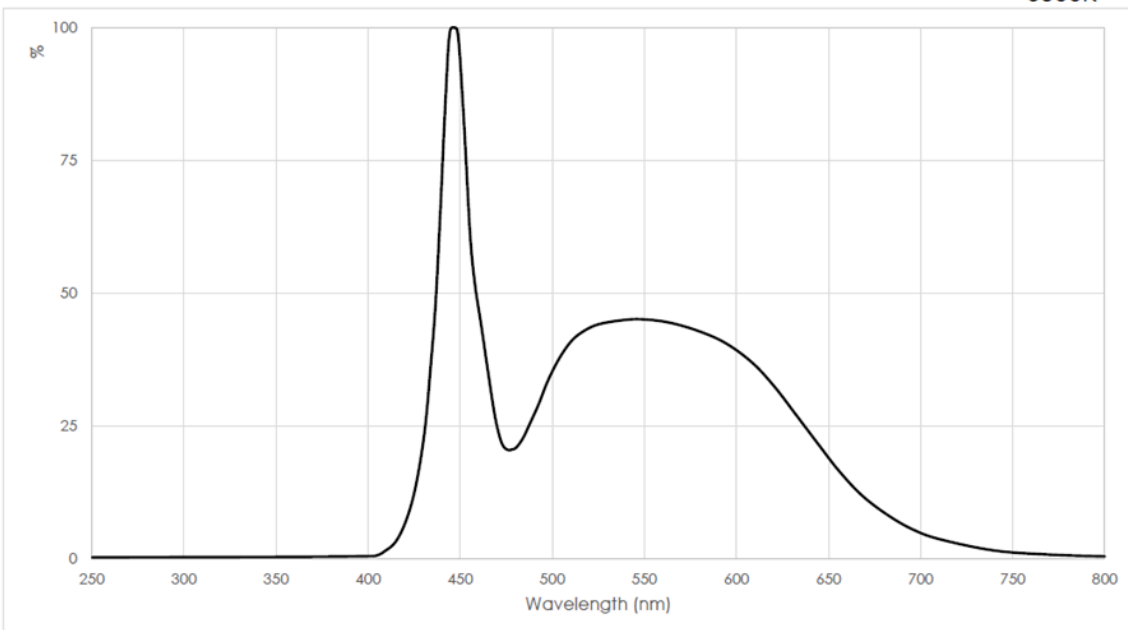

Model placed on the Union market from 01/01/2022



EPREL registration number: 967480

<https://eprel.ec.europa.eu/qr/967480>

Supplier: Fumagalli S.r.l. (Manufacturer)

Website: www.fumagalli.it

Customer care service:

Name: FUMAGALLI SRL

Website: www.fumagalli.it

Email: customerservice@fumagalli.it

Phone: 00390332336353

Address:

Via Ca Bassa 29

21100 Varese

Italy